

NEOSTAR

2S+ Dual-Glass Module
500W-520W

Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values



red dot winner 2023



Product
Warranty



Performance
Warranty



Munich RE 

520W

Output

23.5%

Efficiency




 $\leq 1\%$

First-year Degradation

 $\leq 0.35\%$

Annual Degradation from Year 2-30

30-year Linear Performance Warranty

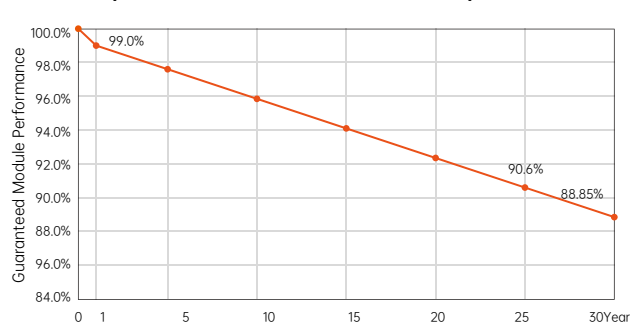

Tolerance

L: ± 2 mmW: ± 2 mm

Unit: mm

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Tolerance: 0~ + 3%

Module Type	AIKO-A500-MAH60Db		AIKO-A505-MAH60Db		AIKO-A510-MAH60Db		AIKO-A515-MAH60Db		AIKO-A520-MAH60Db	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	500	379	505	383	510	386	515	390	520	394
V _{oc} [V]	45.02	42.71	45.12	42.80	45.22	42.90	45.32	42.99	45.42	43.09
V _{mp} [V]	37.90	35.96	38.00	36.05	38.10	36.15	38.20	36.24	38.30	36.34
I _{sc} [A]	14.05	11.35	14.11	11.40	14.17	11.45	14.23	11.49	14.29	11.54
I _{mp} [A]	13.21	10.55	13.30	10.63	13.39	10.70	13.49	10.78	13.58	10.86
Module Efficiency	22.6%		22.8%		23.0%		23.2%		23.5%	

Product Specification

Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm coated semi tempered glass
Frame	Black Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) ± 1200 mm
No. of Cells	120(6*20)
Junction Box	IP68, 3 bypass diodes
Connector	MC4-Evo2
Weight	27.2Kg $\pm 3\%$
Dimension	1954*1134*30mm
Package Detail	37pcs per pallet / 185pcs per 20'GP / 888pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I_{sc} + 0.05%/ °CTemperature Coefficient of V_{oc} - 0.22%/ °CTemperature Coefficient of P_{max} - 0.26%/ °C

Installation Guide

Operation Temperature -40°C - +85°C

Maximum Series Fuse Rating 25A

Protection Class Class II

V_{oc} and I_{sc} Tolerance $\pm 3\%$

Maximum System Voltage DC1500V

Maximum Static Loading Front 5400Pa Back 2400Pa

Hail Test 25 mm diameter hail at 23 m/s

Fire Rating IEC Class A

